



# Harn Ritma

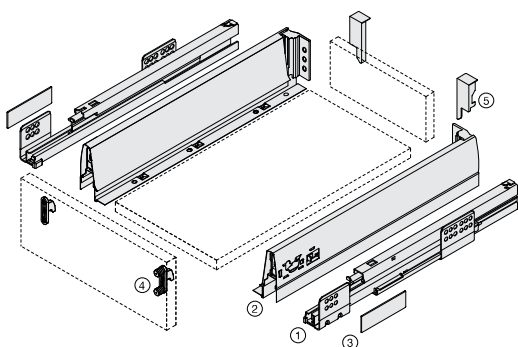

## Ritma Cube Standard Drawer – S


- Soft close roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side 96.5mm
- Load capacity of 35kg or 60kg
- Quick assembly
- Flexible 2-dimensional front adjustment
- Silent integrated cushioning system
- Integrated lateral stabiliser

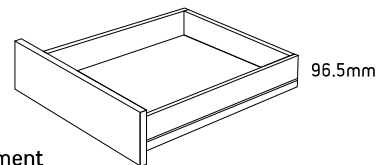


	Kit Part No. Screw-on	Kit Part No. Knock-in	Kit Part No. Expansion	Size	Sales Unit
<b>White</b> 35kg	RKS8327S.WH	RKK8327S.WH	RKE8327S.WH	270mm	Kit
	RKS8335S.WH	RKK8335S.WH	RKE8335S.WH	350mm	Kit
	RKS8340S.WH	RKK8340S.WH	RKE8340S.WH	400mm	Kit
	RKS8345S.WH	RKK8345S.WH	RKE8345S.WH	450mm	Kit
	RKS8350S.WH	RKK8350S.WH	RKE8350S.WH	500mm	Kit
	RKS8355S.WH	RKK8355S.WH	RKE8355S.WH	550mm	Kit
<b>White</b> 60kg	R6RKS8345S.WH	R6RKK8345S.WH	R6RKE8345S.WH	450mm	Kit
	R6RKS8350S.WH	R6RKK8350S.WH	R6RKE8350S.WH	500mm	Kit
	R6RKS8355S.WH	R6RKK8355S.WH	R6RKE8355S.WH	550mm	Kit

\*Grey parts are included in kit

## Space Requirements & Front Installation Dimensions

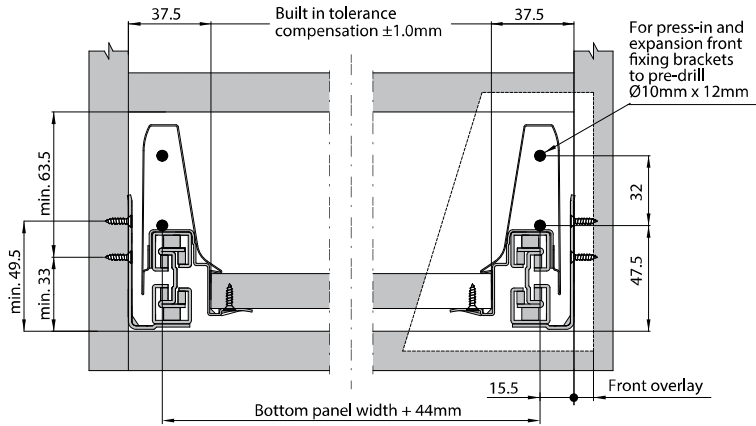

## Back Installation Dimensions



## Cabinet Profile Screw Positions

### 35kg

#### Drawer Length


Min. internal cabinet depth = drawer length + 3 mm  
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

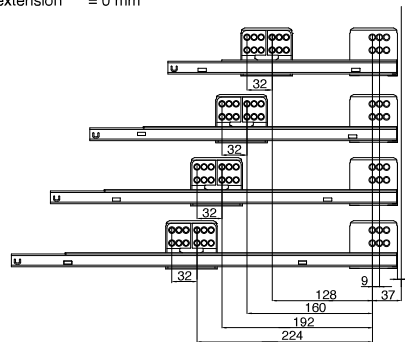

### 60kg

#### Drawer Length


Min. internal cabinet depth = drawer length + 3 mm  
Actual loss of extension = 0 mm

400 mm

450 mm


500, 550 mm

600, 650 mm

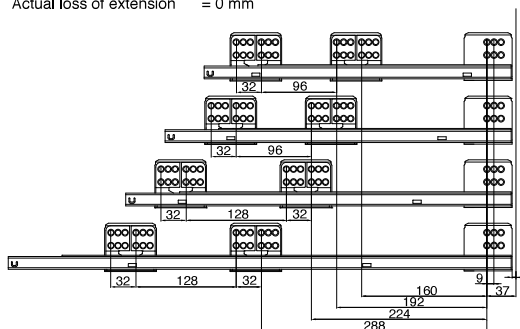

## Cutting Dimensions for 16mm Chipboard

Back panel  
Width = internal cabinet width - 87mm  
Height = 84mm



Bottom panel  
Width = Internal cabinet width - 75mm  
Length = drawer length - 24 mm

## Pre-drilling Dimensions of Bottom Panel for fixing Euro Screws

