



Harn Ritma

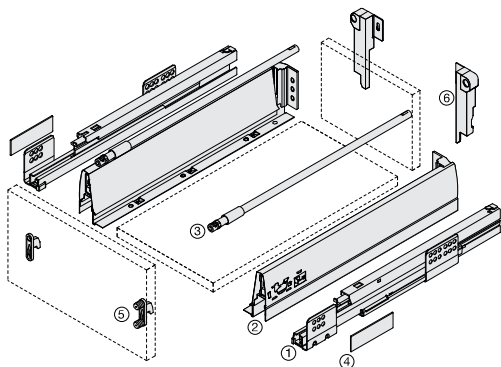


Ritma Cube Standard Drawer – HSS

- Soft close roller bearing concealed runners
- Full extension with synchro control
- Steel drawer side 96.5mm (229mm to top of railing)
- Load capacity of 35kg or 60kg
- Quick assembly
- Flexible 2-dimensional front adjustment
- Sylent integrated cushioning system
- Integrated lateral stabiliser
- **Railing set in square or traditional round style**

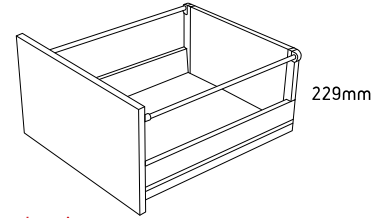

Round Railing

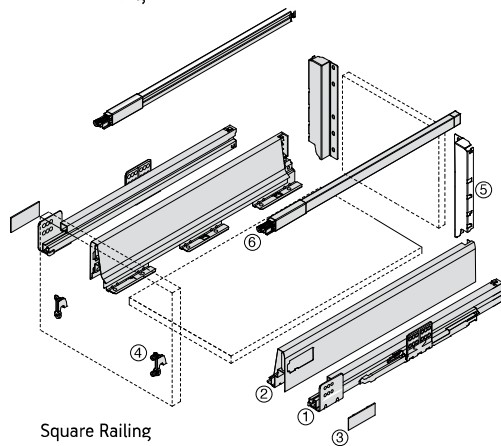

Square Railing

***Grey parts are included in kit**

	Kit Part No. Screw-on	Kit Part No. Knock-in	Kit Part No. Expansion	Size	Sales Unit
--	-----------------------	-----------------------	------------------------	------	------------

Round Railing Set

White	35kg				
	RKS8327HSS.WH	RKK8327HSS.WH	RKE8327HSS.WH	270mm	Kit
	RKS8335HSS.WH	RKK8335HSS.WH	RKE8335HSS.WH	350mm	Kit
	RKS8340HSS.WH	RKK8340HSS.WH	RKE8340HSS.WH	400mm	Kit
	RKS8345HSS.WH	RKK8345HSS.WH	RKE8345HSS.WH	450mm	Kit
	RKS8350HSS.WH	RKK8350HSS.WH	RKE8350HSS.WH	500mm	Kit
	RKS8355HSS.WH	RKK8355HSS.WH	RKE8355HSS.WH	550mm	Kit

White	60kg				
	R6RKS8345HSS.WH	R6RKK8345HSS.WH	R6RKE8345HSS.WH	450mm	Kit
	R6RKS8350HSS.WH	R6RKK8350HSS.WH	R6RKE8350HSS.WH	500mm	Kit
	R6RKS8355HSS.WH	R6RKK8355HSS.WH	R6RKE8355HSS.WH	550mm	Kit


Square Railing Set

White	35kg				
	RKS8327HSSQ.WH	RKK8327HSSQ.WH	RKE8327HSSQ.WH	270mm	Kit
	RKS8335HSSQ.WH	RKK8335HSSQ.WH	RKE8335HSSQ.WH	350mm	Kit
	RKS8340HSSQ.WH	RKK8340HSSQ.WH	RKE8340HSSQ.WH	400mm	Kit
	RKS8345HSSQ.WH	RKK8345HSSQ.WH	RKE8345HSSQ.WH	450mm	Kit
	RKS8350HSSQ.WH	RKK8350HSSQ.WH	RKE8350HSSQ.WH	500mm	Kit
	RKS8355HSSQ.WH	RKK8355HSSQ.WH	RKE8355HSSQ.WH	550mm	Kit


White	60kg				
	R6RKS8345HSSQ.WH	R6RKK8345HSSQ.WH	R6RKE8345HSSQ.WH	450mm	Kit
	R6RKS8350HSSQ.WH	R6RKK8350HSSQ.WH	R6RKE8350HSSQ.WH	500mm	Kit
	R6RKS8355HSSQ.WH	R6RKK8355HSSQ.WH	R6RKE8355HSSQ.WH	550mm	Kit

Space Requirements & Front Installation Dimensions

Round Rail

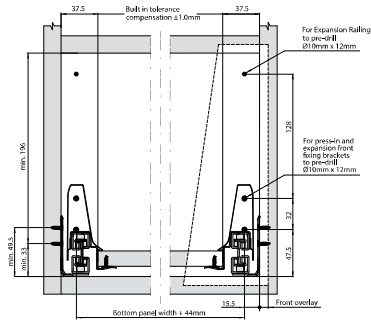


Square Rail

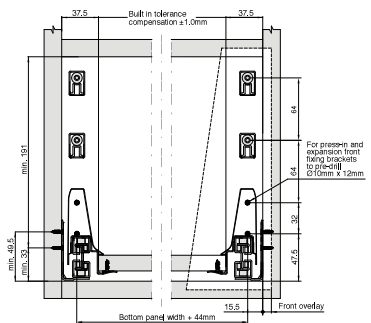


Back Installation Dimensions

Round Rail



Square Rail



Cabinet Profile Screw Positions

35kg

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

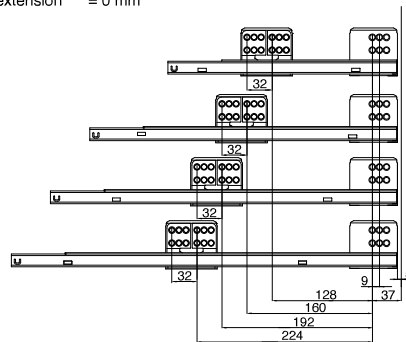

60kg

Drawer Length


Min. internal cabinet depth = drawer length + 3 mm
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

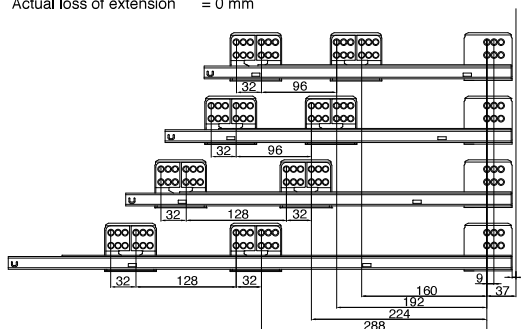

Cutting Dimensions for 16mm Chipboard

Back panel

Width = internal cabinet width - 87mm
Height = 199mm



Bottom panel

Width = Internal cabinet width - 75mm
Length = drawer length - 24 mm

Pre-drilling Dimensions of Bottom Panel for fixing Euro Screws

