# Harn Impaz






## Impaz Standard Drawer/Inner Drawer S Single Extension

- Single extension
- Steel drawer side panels 85mm
- Epoxy coated
- Load capacity of 30kg
- Self closing feature
- Flexible 2-dimensional front adjustment
- Smooth rolling mechanism
- Double out-stop safety feature
- Locked-in position when fully extended







			<b>4</b>			
						Sales
				Size	Finish	Unit
	Screw On Base Fixing	Plug On Base Fixing				
	4020.27	4021.27		270mm	WH	Set
	4020.35	4021.35		350mm	WH	Set
① Drawers	4020.40	4021.40		400mm	WH	Set
	4020.45	4021.45		450mm	WH	Set
	4020.50	4021.50		500mm	WH	Set
	4020.55	4021.55		550mm	WH	Set
2	Cover caps —					
	See page 4.71					
	Part No.	Part No.	Part No.			
	Screw-on D::::::>	Knock-in []]]]	Expansion 🏻			
77	RBF11240.RH	RBF12240.RH	RBF13240.RH	Right	-	
3 std	RBF11240.LH	RBF12240.LH	RBF13240.LH	Left	-	
Front Fixing						
Brackets Lo	RBF16040.RH	RBF17040.RH	RBF18040.RH	Right	_	
Clip	RBF16040.LH	RBF17040.LH	RBF18040.LH	Left	_	
4	RBF31040.RH			Right	WH	Ea
Internal Fixing Brackets	RBF31040.LH			Left	WH	Ea



### Space Requirements & Front Installation Dimensions

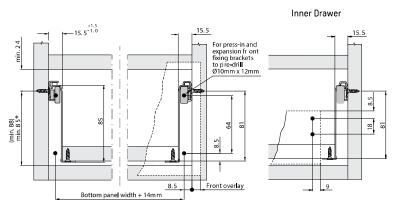




() Inner Drawer \*Add 8mm when used with 201.000 Drawer Front Locking Piece.

#### **Cabinet Profile Screw Positions**







### Cutting Dimensions for 16mm Chipboard

## Standard Drawer Back Panel Width = internal cabinet width - 31mm Height = 71mm Bottom Panel Width = internal cabinet width - 31mm Length (wooden back) = Drawer length - 2mm

#### Pre-drilling Dimensions of Bottom Panel for Plug in







For drawers over 700mm in width we recommend the use of the Euro Orvel Lock & Support for Wide Drawers. Ref page 3.84.

