



# Harn Ritma

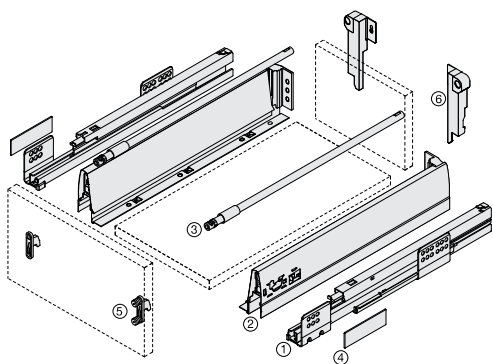


## Ritma Cube Standard Drawer – MS

- Soft close roller bearing concealed runners
- Full extension with synchro control
- 96.5mm steel drawer side (157mm to top of railing)
- Load capacity of 35kg or 60kg
- Quick assembly
- Flexible 2-dimensional front adjustment
- Syilent integrated cushioning system
- Integrated lateral stabiliser
- Railing set in square or traditional round style

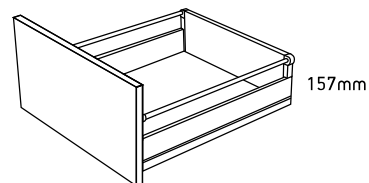

Round Railing

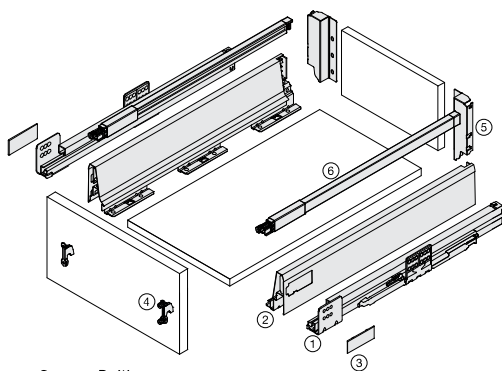

Square Railing

\*Grey parts are included in kit

 Kit Part No. Screw-on 	Kit Part No. Knock-in 	Kit Part No. Expansion 	Size	Sales Unit
---	---	--	------	------------

### Round Railing Set


White	35kg				
	RKS8327MS.WH	RKK8327MS.WH	RKE8327MS.WH	270mm	Kit
	RKS8335MS.WH	RKK8335MS.WH	RKE8335MS.WH	350mm	Kit
	RKS8340MS.WH	RKK8340MS.WH	RKE8340MS.WH	400mm	Kit
	RKS8345MS.WH	RKK8345MS.WH	RKE8345MS.WH	450mm	Kit
	RKS8350MS.WH	RKK8350MS.WH	RKE8350MS.WH	500mm	Kit
	RKS8355MS.WH	RKK8355MS.WH	RKE8355MS.WH	550mm	Kit
White	60kg				
	R6RKS8345MS.WH	R6RKK8345MS.WH	R6RKE8345MS.WH	450mm	Kit
	R6RKS8350MS.WH	R6RKK8350MS.WH	R6RKE8350MS.WH	500mm	Kit
	R6RKS8355MS.WH	R6RKK8355MS.WH	R6RKE8355MS.WH	550mm	Kit

### Square Railing Set


White	35kg				
	RKS8327MSQ.WH	RKK8327MSQ.WH	RKE8327MSQ.WH	270mm	Kit
	RKS8335MSQ.WH	RKK8335MSQ.WH	RKE8335MSQ.WH	350mm	Kit
	RKS8340MSQ.WH	RKK8340MSQ.WH	RKE8340MSQ.WH	400mm	Kit
	RKS8345MSQ.WH	RKK8345MSQ.WH	RKE8345MSQ.WH	450mm	Kit
	RKS8350MSQ.WH	RKK8350MSQ.WH	RKE8350MSQ.WH	500mm	Kit
	RKS8355MSQ.WH	RKK8355MSQ.WH	RKE8355MSQ.WH	550mm	Kit
White	60kg				
	R6RKS8345MSQ.WH	R6RKK8345MSQ.WH	R6RKE8345MSQ.WH	450mm	Kit
	R6RKS8350MSQ.WH	R6RKK8350MSQ.WH	R6RKE8350MSQ.WH	500mm	Kit
	R6RKS8355MSQ.WH	R6RKK8355MSQ.WH	R6RKE8355MSQ.WH	550mm	Kit

## Space Requirements & Front Installation Dimensions

Round Rail

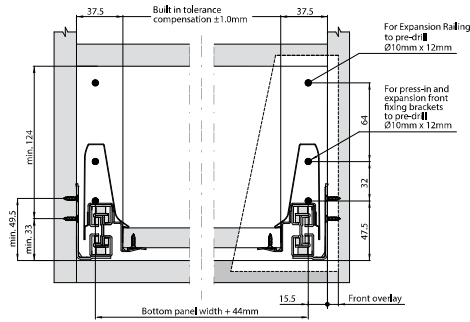


Square Rail

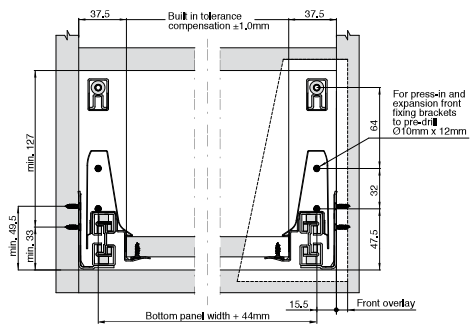


## Back Installation Dimensions

Round Rail



Square Rail



## Cabinet Profile Screw Positions

### 35kg

#### Drawer Length


Min. internal cabinet depth = drawer length + 3 mm  
Actual loss of extension = 0 mm

270, 300, 350 mm

400 mm

450 mm

500, 550 mm

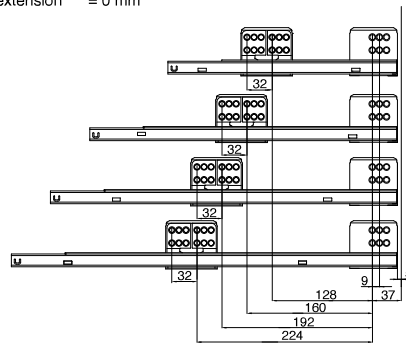

### 60kg

#### Drawer Length


Min. internal cabinet depth = drawer length + 3 mm  
Actual loss of extension = 0 mm

400 mm

450 mm

500, 550 mm


600, 650 mm

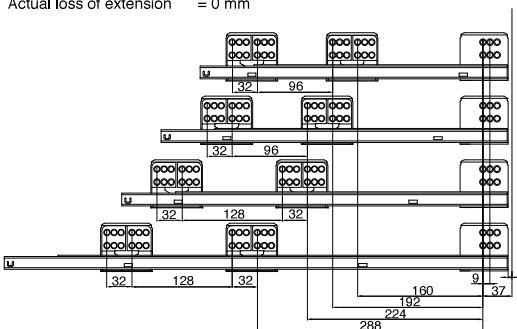

## Cutting Dimensions for 16mm Chipboard

#### Back panel


Width = internal cabinet width - 87mm  
Height = 135mm

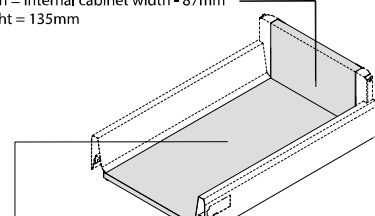

#### Bottom panel

Width = Internal cabinet width - 75mm  
Length = drawer length - 24 mm

## Pre-drilling Dimensions of Bottom Panel for fixing Euro Screws

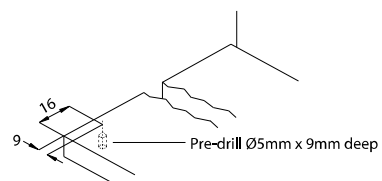

For drawers over 700mm in width we recommend the use of the Euro Orvel Lock & Support for Wide Drawers. Ref page 3.84.